

# Catalyst XL

## Catalyst Video Wall Processor



Catalyst XL is the undisputed workhorse of the Catalyst line and is ideal for medium to large sized video wall installations such as control rooms, government command centers, surveillance rooms, and utility centers. The Catalyst XL delivers the best in class solution for essential and critical control rooms as it can display any amount or type of data required to enhance operations.

- Enterprise grade Xeon processors
- Windows 10
- Up to 1500+ IP streams
- Up to 39 8K inputs
- Web/VNC/Application support
- HDCP compliant
- Standalone or Canvas Enterprise
- Compatible with PANA 21:9, 5K displays
- Compatible with LCD, LED, cubes and projectors display technologies
- RAID & redundant power supplies



156

Supports up to 156  
4K direct inputs




More 4K IP and direct inputs,  
more memory, and more power for  
unparalleled bandwidth speed



Decode up to 1,000+  
H.264 streams

## Architecture of a Catalyst Installation

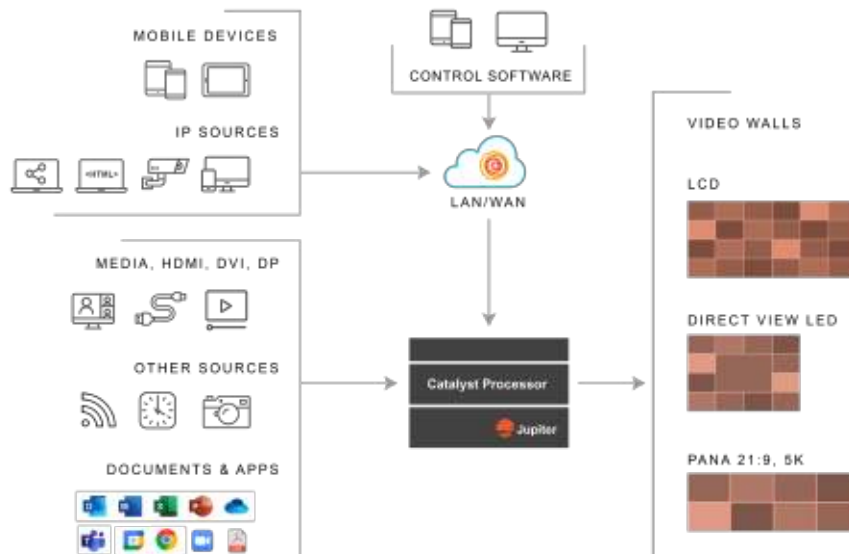

# Catalyst XL Specifications

OUTPUTS	
8 Channel Graphics Board	<b>Outputs:</b> Up to 8x 1080P or 4x 4K mini-DP 1.2 outputs <b>Resolution:</b> Up to 3840 x 2160
4 Channel Graphics Board	<b>Outputs:</b> Up to 4x 1080P or 4x 4K mini-DP 1.4 outputs <b>Resolution:</b> Up to 5120 x 2160
DIRECT INPUTS	
4 Channel HDMI Capture Board	Up to 4x 1080P @ 60Hz or 4K @ 30Hz inputs
2 Channel DP Capture Board	Up to 2x DisplayPort 4K @ 60Hz inputs
2 Channel DVI Capture Board	Up to 2x DVI-D 1080P @ 60Hz or 1 4K@ 30Hz inputs
NETWORK INPUTS	
StreamPoint Decoder Board	2x: 3840 x 2160 @ 60Hz, 4x: 3840 x 2160 @ 30Hz, 8x: 1920 x 1080 @ 60Hz, 16x: 1920 x 1080 @ 30Hz , 30+ SD Streams
Max Software Decoding per System	1x: 3840 x 2160 @ 60Hz, 3x: 3840 x 2160 @ 30Hz, 6x: 1920 x 1080 @ 60Hz, 12x: 1920 x 1080 @ 30Hz, 30+ SD Streams
VNC Decoding	<b>Inputs:</b> Up to 32 VNC Streams, <b>Server:</b> Software included <b>Color Depth:</b> Up to 32 bits per pixel
Web	<b>Inputs:</b> Up to 32 web pages <b>Browser:</b> Embedded Chrome** or Internet Explorer
HARDWARE	
Chassis Form Factor	1 RU CPU Chassis + Up to three 4 RU Express Chassis
CPU Processor	Intel ES 6 and 14 Core Xeon
Max System PCIe Slots	40
RAM	64, 128 GB RAM
Operating Systems	Windows 10 Enterprise
Drives	500 or 1000 GB SSD
RAID	RAID 1 + Hot Spare
Network Interface: Ethernet	Standard Dual 100/1000 Mbps RJ45 ports
USB and Input Devices (USB)	2 USB 3.0, 4 USB 2.0, 104-key keyboard and mouse
Operating Temperature	0° to +40° C
Audio Card	3.5mm stereo and digital output
CPU Chassis Dimension	1.75" H x 19" W x 22.5" D (44.5mm x 482.6mm x 571.5mm)
Express Chassis Dimension	7.00" H x 19" W x 22.5" D (17.8 cm x 48.3 cm x 57.2 cm)
Orientation	5-17 RU
Weight	40 lbs. (18.2 kg.)
Shipping Weight	50 lbs. (22.7 kg.)
Operating Range	Power Consumption
Temperature	32° F -104° F (0°C -40°C), Non-operating: 14° F -150° F (-10°C -66°C)
Humidity	10-90% non-condensing
Altitude	Up to 10,000 feet (3,048.0 m)
Electrical - Redundant Power	High efficiency (94%) with PMBus and I2C
Line Frequency	50-60 Hz
CPU Power Consumption	240 Watt Redundant PSU
Express Power Consumption	500 Watt Redundant PSU
SOFTWARE	
Applications	Windows 10 applications
API	HTTP REST or TCP
CERTIFICATIONS	
Regulatory Certifications	UL, TAA, CE, FCC



jupiter.com

© 2021 Jupiter. Jupiter is a registered trademark of Jupiter Systems, Inc. Product specifications and designs are subject to change without notice. All brand and product names and logos are registered trademarks of Jupiter Systems, Inc.